




COMMERCIAL - ALL TERRAIN


Firestone

TRANSFORCE™ AT2

WHEREVER THE JOB IS,
DEPEND ON FIRESTONE
TO GET YOU THERE

FEATURES AND BENEFITS

 Strong for on-road/off-road

 Improved wet performance*

 Longer-lasting performance

BUILT WITH A CHIP AND TEAR RESISTANT COMPOUND

tough enough to deal with
rough road conditions like
gravel

DEEPER TREAD FEATURES

improves wet and snow
traction

PATTERN FEATURES COMBINED WITH AN INNOVATIVE TREAD- TO-ROAD CONTACT FOOTPRINT

help retain performance for longer
over the course of the tire service life



*As compared to original Transforce AT tire.

Firestone

ENGINEERED FOR:




TOP FITMENTS: Chevrolet Silverado 3500, Dodge Ram 3500

TIRE TYPE: Commercial - All Terrain

WARRANTY: Gold Pledge Limited Warranty and Buy & Try, 30-Day Guarantee^{††}



PERFORMANCE CHARACTERISTICS[†]

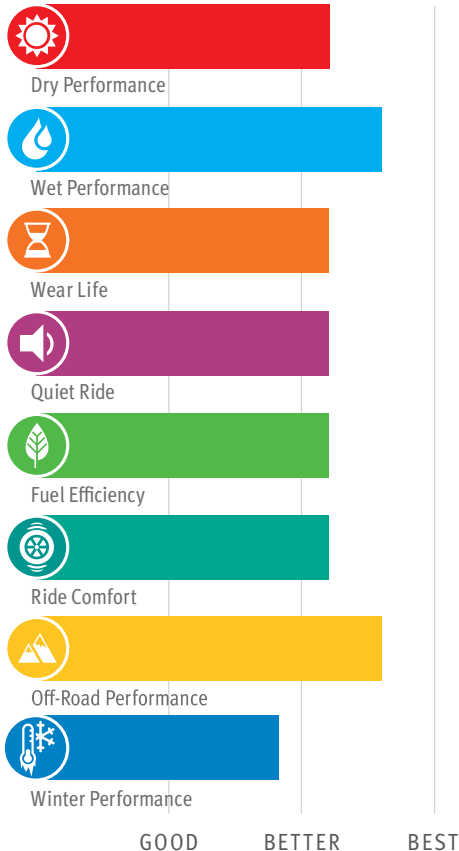

[†]Designed as a general guideline to compare products within the Bridgestone and Firestone product portfolios. Based on the technologies featured in each tire and not on performance-testing data.

^{††}Certain conditions and limitations apply. See a Bridgestone representative or warranty manual for details.

TIRE SPECIFICATIONS

Tire Size and Service Description	Load Range	Article Number	Sidewall Styling	Approved Rim Widths	Measuring Rim Widths	Overall Tire Diameter	Overall Section Width	Tread Depth (32nd)	Minimum Dual Spacing	Revs Per Mile	UTQG	WL
16" Rim Diameter												
LT215/85R16 115/112R	E	000178	BW	5.5-7.0	6.0	30.4	8.5	16	-	685	-	37
LT225/75R16 115/112R	E	000180	BW	6.0-7.0	6.0	29.3	8.8	16	-	711	-	36
LT245/75R16 120/116R	E	000181	BW	6.5-8.0	7.0	30.5	9.8	17	-	684	-	41
LT265/75R16 123/120R	E	000182	BW	7.0-8.0	7.5	31.7	10.5	17	-	658	-	43
17" Rim Diameter												
LT235/80R17 120/117R	E	000185	BW	6.0-7.5	6.5	31.8	9.3	17	-	655	-	41
LT225/75R17 116/113R	E	000183	BW	6.0-7.5	6.0	30.3	8.8	16	-	687	-	38
LT245/75R17 121/118R	E	000184	OWL	6.5-7.5	7.0	31.5	9.8	17	-	661	-	43
LT245/70R17 119/116R	E	000186	BW	6.5-8.0	7.0	30.6	9.8	17	-	682	-	41
LT265/70R17 121/118R	E	000187	OWL	7.0-8.5	8.0	31.7	10.7	17	-	658	-	46
LT285/70R17 121/118R	E	000780	BW	7.5-9.0	8.5	32.8	11.5	18	-	636	-	34
18" Rim Diameter												
LT265/70R18 124/121R	E	000188	BW	7.0-9.0	8.0	32.6	10.7	17	-	638	-	50
LT275/70R18 125/122R	E	000189	OWL	7.0-8.5	8.0	33.2	11.0	18	-	628	-	53
LT275/65R18 123/120R	E	000190	OWL	7.5-9.0	8.0	32.1	11.0	16	-	649	-	51

TIRE SPECIFICATIONS LEGEND

* OEM Tire	OWL Outline White Letter	~ Pinned for #12 Stud Sizes
¥ MOE (Mercedes Exclusive)	WS White Stripe	f Pinned for #15 Stud Sizes
^ RFT (Run Flat Tire)	XL Extra Load (XL)	** Pinned for #16 Stud Sizes
BW Blackwall	◆ Pinned for #11 Stud Sizes	*** Pinned for #17 Stud Sizes

■ New sizes